TUNKIA

COMPREHENSIVE SOLUTION FOR ELECTRIC VEHICLE CHARGING STATION TESTING

@Tunkia Calibration & Measurement

Tunkia Co.,Ltd.
www.tunkia.com

Why can TK4830 use electric vehicles as a load?

Combining wide dynamic range measurement technology and millisecond-level high-speed energy metering, it presents a more accurate reflection of charging equipment performance.

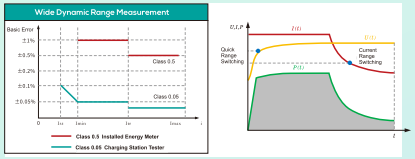



We have solved two major challenges of using new energy vehicles as loads!

1. In a wide dynamic range, there is a risk of gear skipping, resulting in inaccurate accumulated electric energy (Fig 1) .

2. Dealing with fluctuating loads from new energy vehicles, where energy output changes rapidly. Traditional calibration devices refresh only 15 times per second, making cumulative energy accuracy hard to guarantee (Fig 2).

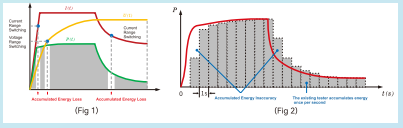

On-site Comprehensive Testing Solution

· Can be used with programmable resistive loads for full power testing.
· Three power supply methods: utility power, built-in lithium batteries, and power from the charging gun.
· Equipped with host computer software and interfaces to establish an automatic test system.
· Suitable for metrology organizations, power departments, and third-party testing organizations.

IEC 62196-2 IEC 62196-3 CHAdeMO ……

TD1320	Portable Tester for DC EV Chargers	· Metrology Verification · On-site Acceptance · Maintenance Inspection · Environmental Temperature Measurement · Clock Calibration Function · Traceabale Calibration
TD1330	Portable Tester for AC EV Chargers	
TK4830	Portable Tester for AC DC EV Chargers	

Vehicle-Mounted Testing Solution

· Applicable to the testing of DC charging stations up to **180 kW** and AC charging stations up to **63 A** according to GB/T standards.

· Test items: appearance inspection, insulation resistance test, working error, clock time error, communication protocol consistency test, interoperability test, functional test, safety test, electrical performance test and other inspection items.



Efficient Spatial Layout

Excellent Cooling Design

External Test Interface

Automatic Testing Inside

TK4830 Portable Tester for AC & DC EV Chargers

- TK4830 is an comprehensive AC and DC charging station calibration device. With an impressive accuracy of 0.05% in AC and DC power measurement, it proficiently conducts working error and clock time tests for both types of charging stations.
- This versatile device is capable of using new energy vehicles as loads or applying resistive loads for testing. Leveraging advanced technologies like wide dynamic range measurement and millisecond-level high-speed electric energy refresh, it ensures precise measurement of accumulated energy during the entire charging process.

Applications

- **Working Error:** The working error test can be completed in real time during the charging process through the pulse method or the accumulated electric energy method. It supports two methods of testing: using new energy vehicles as loads or programmable resistive loads as loads.
- **Clock Verification:** It has time verification function, real-time clock display, and clock time error test of the charger.
- **Temperature verification:** Equipped with a wired temperature probe, which can complete on-site temperature testing.

Test with resistive load

Specifications

DC Measurement Function			
DC Voltage	Measuring Range		200 V ~ 1000 V
	Measurement Uncertainty (k=2)		0.025%*RD
DC Current	Measuring Range		1 A ~ 300 A
	Measurement Uncertainty (k=2)	5 A ≤ I ≤ 300 A	0.025%*RD
		1 A ≤ I < 5 A	0.05%*RD
Power/Energy	Measurement Uncertainty (k=2)	5 A ≤ I ≤ 300 A	0.05%*RD
		1 A ≤ I < 5 A	0.1%*RD
AC Measurement Function			
AC Voltage	Measuring Range		three-phase 200 V ~ 480 V
	Measurement Uncertainty (k=2)		0.025%*RD
AC Current	Measuring Range		three-phase 0.1 A ~ 80 A
	Measurement Uncertainty (k=2)		0.025%*RD
Power/Energy	Measurement Uncertainty (k=2)		0.05%*RD
Clock Function			
Clock	Timing Mode		GPS Clock timing
	Time Error		≤ 1s
Temperature Function			
Temperature	Measuring Range		-30 ℃ ~ 60 ℃
	Maximum Permissible Error		0.5 ℃
General Specification			
Power Supply Mode	(1) Utility power: support 85 V ~ 265 V, 47Hz ~ 63 Hz (2) Charging gun head takes power (3) Removable built-in lithium battery		
Communication Interface	USB, LAN, Bluetooth or WiFi		

TD1320 Portable Tester for DC EV Chargers

- TD1320 is a portable instrument dedicated to on-site testing of DC EV charging stations. The instrument can be combined with TK4710 DC resistive load to complete the metrology characteristic test, interoperability test and communication protocol conformance test of DC charging stations.

- DCV measurement: **30 V ~ 1000 V**; DCI measurement: **0.5 A ~ 250 A**
  DC energy measurement accuracy: **500 ppm, 0.1%**
  Temperature measurement: -30 ℃ ~ 60 ℃, max allowable error: **0.5 ℃**
  Clock function: timing mode: GPS clock timing; accuracy: **1 s/d**

TD1330 Portable Tester for AC EV Chargers

- TD1330 is a portable instrument dedicated to on-site testing of AC EV charging stations. The instrument can be combined with TK4720 AC adjustable resistive load to complete the metrology characteristics test and interoperability test of AC charging station.

- Three-phase ACV measurement: **30 V ~ 300 V**; Three-phase ACI measurement: **10 mA ~ 78 A**
  AC energy measurement accuracy: **500 ppm, 0.1%**
  Frequency range: **45 Hz ~ 65 Hz**; Phase range: **0.000° ~ 359.999°**
  Temperature measurement: -30℃ ~ 60℃, max allowable error: **0.5 ℃**
  Clock function: timing mode: GPS clock timing; accuracy: **1 s/d**

Adjustable Resistive Loads

TK4710-20kW

TK4710-30kW

TK4710-60kW

TK4720-9kW

TK4720-45kW

TK4730

TK4710 DC Adjustable Resistive Load
Rated power: 20 kW, 30kW, 60 kW

TK4720 AC Adjustable Resistive Load
Rated power: 9 kW (single-phase), 45 kW (three-phase)

TK4730 AC DC Adjustable Resistive Load
Rated power: 5 kW, 10 kW

TK4850E DC EV Charging Station Testing Device

- TK4850E is one of the all-in-one portable instruments specially designed for on-site testing of DC chargers of electric vehicles. The instrument integrates a small DC load, supports load expansion, and supports using new energy vehicles as loads.
- With a **built-in 8 kW DC load**, a single device can test the DC EV chargers. The load can be cascaded, up to 240kW.

TK4860E AC EV Charging Station Testing Device

- TK4860E is one of the all-in-one portable instruments specially designed for on-site metrological testing of AC charging stations for electric vehicles. It is available in single-phase and three-phase options.
- Single-phase TK4860E-S with a built-in **8 kW** single-phase AC load. In addition to the built-in **8 kW** single-phase AC load, the three-phase TK4860E-T can also be cascaded with three-phase **45kW** resistive loads or electric vehicles.

Traceability for Charging Station Testing Instrument

· High-precision traceability equipment ensures the utmost accuracy for charging station testing instruments.

· Traditionally, traceability relied on standard meter calibration, using pulse methods for operational error checks and only supporting steady-state calibration under constant voltage or current.

· **Our cutting-edge traceability solution keeps up with the latest requirements, adding cumulative energy error calibration under fluctuating loads and utilizing millisecond-level energy refreshing technology, achieving static accuracy as low as 0.01% and dynamic accuracy as low as 0.02%.**

· The calibration device includes dedicated calibration gun cable, gun head metrology, current channel switching, and fully automatic software, offering a more professional and convenient on-site calibration traceability solution.

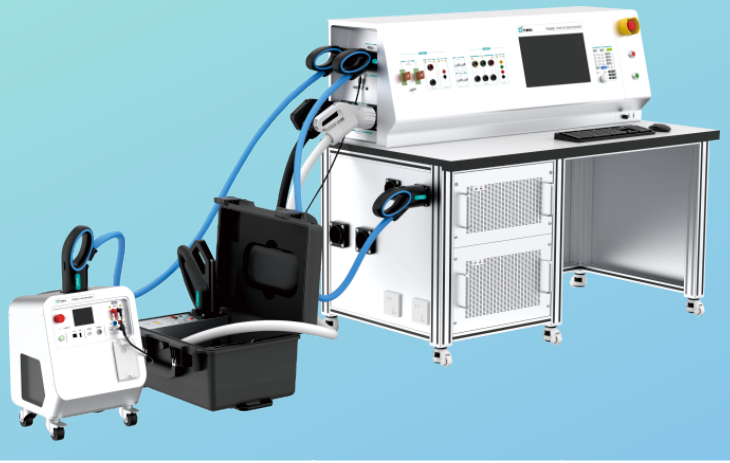

TK4800	DCV: 100 V ~ 1150 V DCI: 0.1 A ~ 300 A	10 ms refresh	Accuracy: 0.01% (static)
	ACV: 220 V ± 20% ACI: 10 mA ~ 80 A	20 ms refresh	Accuracy: 0.02% (dynamic)
TD1545	DCV Output: 10 mV~1150 V / 1550V (optional) DCI Output: 1 mA~600 A		Accuracy: 0.02%, 0.05%
TD1300	DCV Measurement: 10 mV ~ 1150 V DCI Measurement: 10 μA ~ 120 A		Accuracy: 0.01%, 0.02%

CUSTOMER CASE

Charging Station Vehicle-mounted Comprehensive Testing System

EV Charger On-site Testing in Thailand

EV Charger On-site Testing in Macao
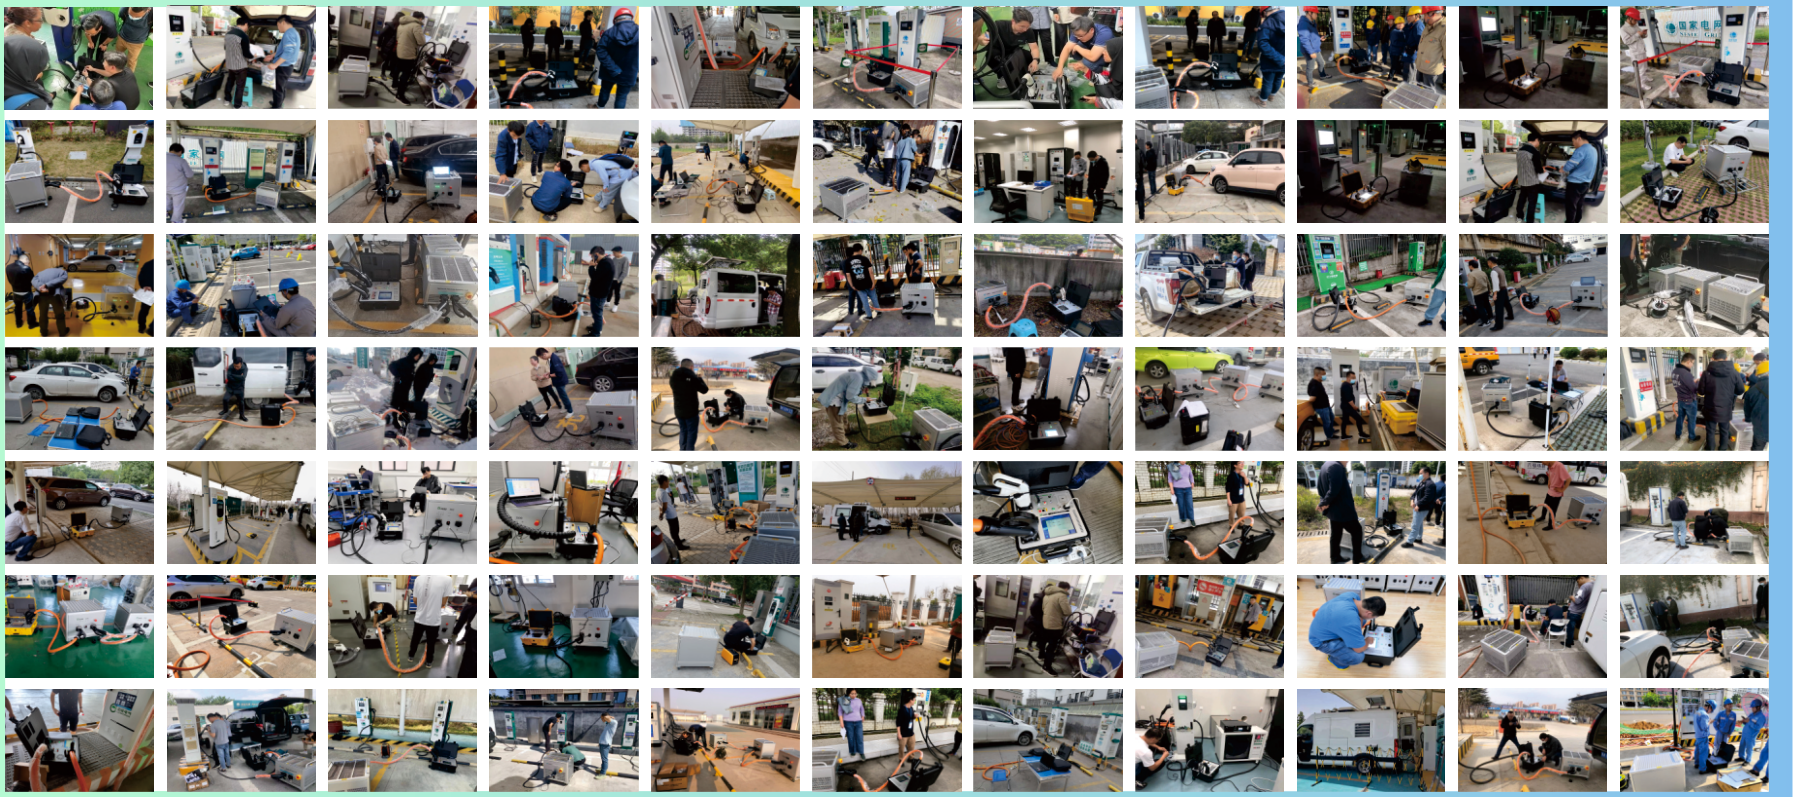
Charging Station Full-Performance Laboratory